


Model R32BRTO

Royalton 32 Basket

Rethermalization Oven

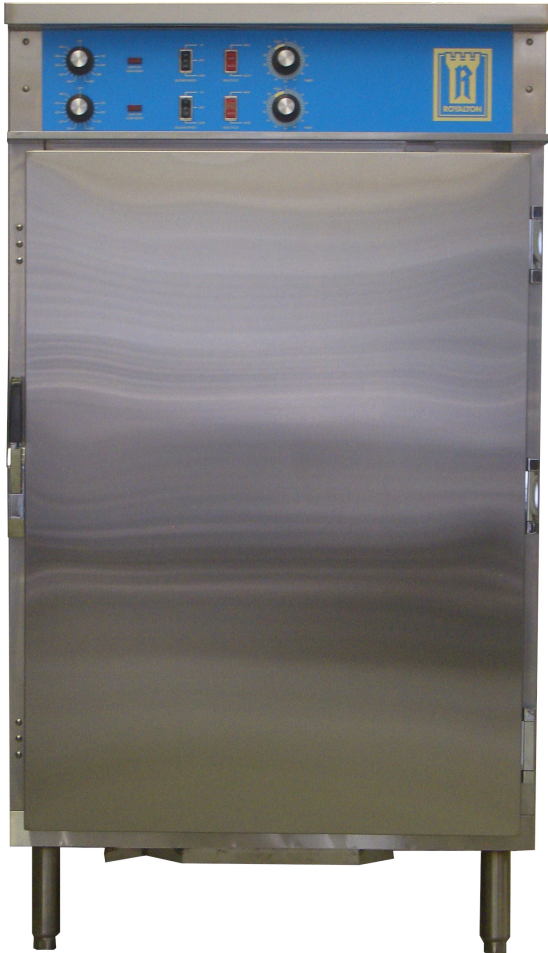

Performance Features

- Unit shall be heated by two (2) sets of three (3) tubular heaters, each set controlled by independent snap-action thermostats and two 60-minute timers
- Air in baking chamber shall be circulated by two (2) ¾hp motors, and two (2) speed blower motors
- Transport cart model #R32BTPC and dolly model #R32BTFD to be sold separately
- Retherms frozen entrees, precooked products to perfection
- Greatly reduces labor costs
- Motor: 2 - Two speed 3/4-1/4hp (1725 and 1140 rpm)
- Temperature range: 150F – 550F
- Capacity: 32-13"x26" x 2 5/8" wire baskets
- Food Capacity: 320-14oz single serving containers
280lbs max.

Construction Features


- Exterior, interior, and door construction 20 gauge stainless steel
- Internal frame construction on door 16 gauge mild steel
- Internal frame construction on sides and bottom 13 gauge mild steel
- Unit top, bottom, back, sides and door fully insulated
- Unit supported by four 7" adjustable stainless steel legs
- Outside Dimensions: 34-3/8" W x 45-1/4" D x 61-3/16" H
- Inside Dimensions: 29-3/4" W x 28-1/2" D x 41-1/2" H
- Clearance below oven: 7-3/16"



ROYALTON

FOOD SERVICE EQUIPMENT COMPANY

R32BRTO

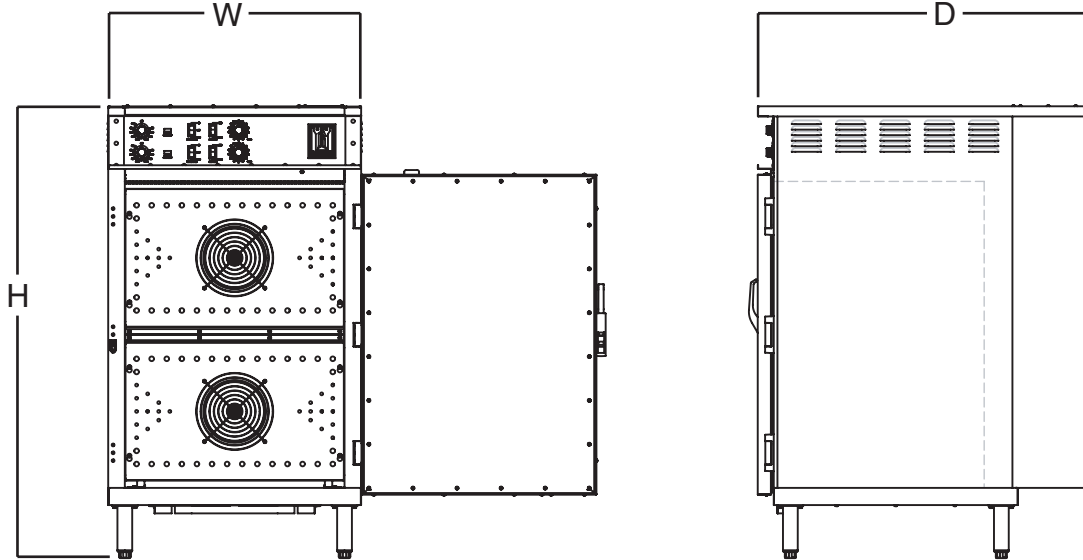

Model Number	13x26x2 ⁵ / ₈ Basket	Height (H)	Depth (D)	Width (W)	Shipping Wt. (lbs)	Volts	Total Watts	Total Amps Single Phase	Total Amps Three Phase	Hertz	Circuit Breaker Size Single Phase	Circuit Breaker Size Three Phase
	MAX											
R32BRTO	32	61 ³ / ₁₆ "	45 ¹ / ₄ "	34 ³ / ₈ "	536#	208	21,500	103 1Ø	L1 62.2 L2 62.2 L3 55.6 3Ø	60	175A	100A

Bidding Specifications

Royalton Model # R32BRTO, retherm convection oven with optional roll in dolly, accommodates up to 32 wire baskets (13"x26"x2 5/8"). Food capacity 320-14oz single serving containers, 280# max, fully insulated, stainless steel construction.

NOTE: Cart, dolly, and baskets sold separately.